HME AHRENS-FOX CORE30



SPECIFICATIONS

- Chassis: AF1†
- Cab: MFDxl 12” Raised Roof††
- Engine: Cummins L9 (450 HP/1250 Torque lb.-ft.)††
- Transmission: Allison 3000EVS
- Pump: Hale Qmax (1500 GPM)††
- Tank: 1000 Gallon Tank
- Foam: Hale FoamLogix 2.1††
- Lighting: Whelen and HiViz
- 24” Front Bumper Extension††
- Compartment Space: 301.5 cu. ft.
- Ladders: Through the Tank

† Prior generation chassis. CORE30 available on multiple custom chassis.
†† Other options available. Contact your HME dealer for additional information.
††† Hendrickson front and rear enables: 3-year warranty


AVAILABLE OPTIONS††


- Collision Mitigation: 4Front Driver’s and Officer’s Airbags and RollTek
- Collision Avoidance: HAAS Alert
- Clean Cab: By Active Air
- Multiple Suspension Options:
  - Front: Air-ride Reyco Granning IFS or Hendrickson STEERTEK NXT††† (Parabolic Leaf)
  - Rear: Hendrickson FIREMAXX Air-ride††† or Air Link Redline (Air Spring Over Walking Beam)


HME Ahrens-Fox
1950 Byron Center Ave SW
Wyoming, MI 49519
616.534.1463
FIRETRUCKS.COM


LEARN MORE

HME AHRENS-FOX PUMPER

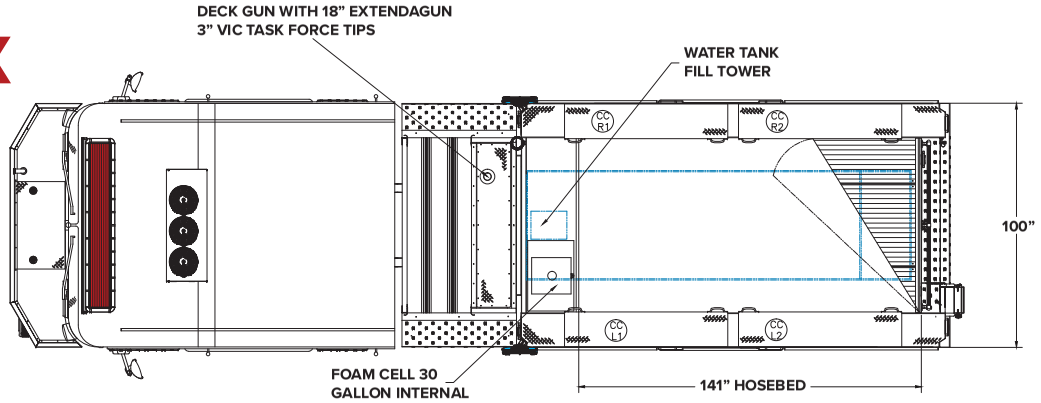

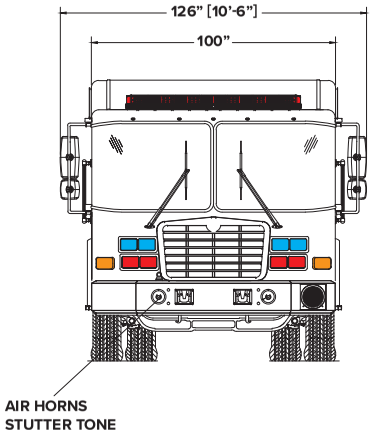


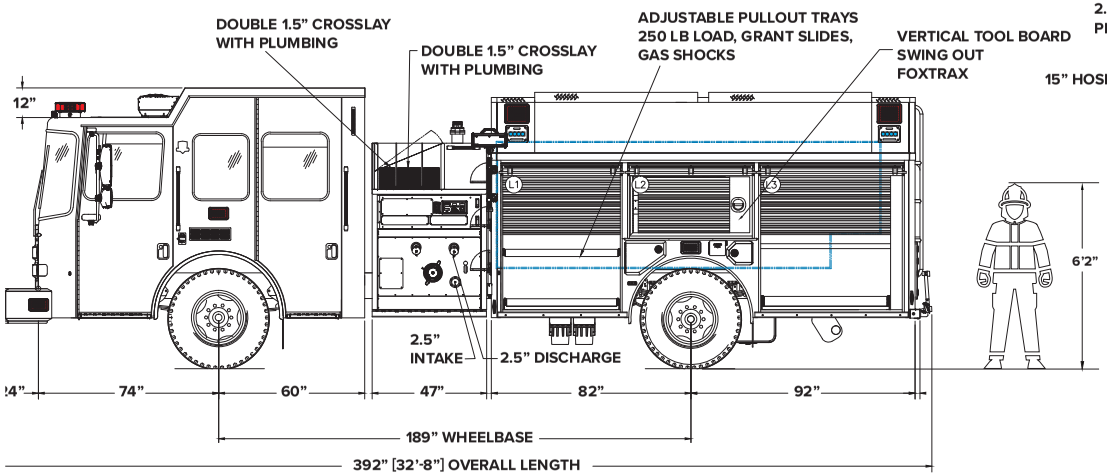

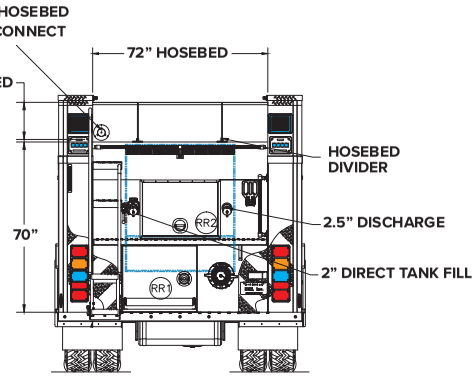

COMPARTMENTS

LOCATION	BEHIND DOOR			DEPTH		VOLUME (CUBIC FEET)
	WIDTH	HEIGHT	DEPTH	DOOR WIDTH	DOOR HEIGHT	
L1	56"	63"	24"	47"	53.5"	49.0
L2	52"	33"	24"	49"	23.5"	23.8
L3	61"	63"	24"	57"	53.5"	53.4
R1	56"	63"	24"	47"	53.5"	49.0
R2	52"	33"	24"	49"	23.5"	23.8
R3	61"	63"	24"	57"	53.5"	53.4
CCL1	138"	12"	24"	67"	11.5"	23.0
CCL2				67"	11.5"	
CCR1	138"	12"	24"	67"	11.5"	23.0
CCR2				67"	11.5"	
RR1	48"	29"	22"	45.5"	20.5"	17.7
TOTAL						301.5

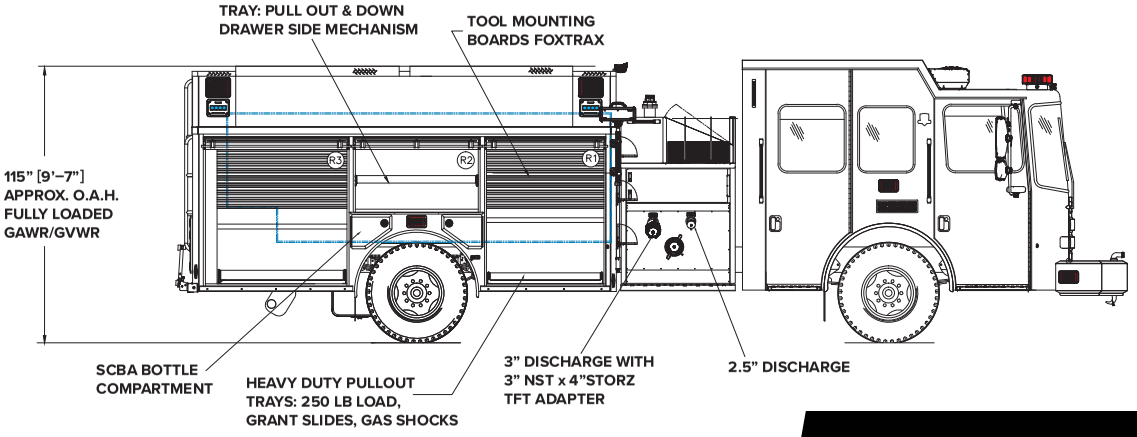

CORE30